


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>F16J 15/32, F16D 65/00, 65/56, 65/16</b>		A1	(11) International Publication Number: <b>WO 99/49242</b>
			(43) International Publication Date: 30 September 1999 (30.09.99)
(21) International Application Number: <b>PCT/GB99/00839</b>		(81) Designated States: BR, IN, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>18 March 1999 (18.03.99)</b>			
(30) Priority Data: 9806543.6                      26 March 1998 (26.03.98)                      GB		Published With international search report.	
(71) Applicant (for all designated States except US): MERITOR HEAVY VEHICLE BRAKING SYSTEMS (UK) LIMITED [GB/GB]; 21 Suttons Park Avenue, Suttons Business Park, Reading, Berks. RG6 1LA (GB).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): ROBERTS, Paul [GB/GB]; 97 Brynglas Road, Newport, South Wales NP9 5QU (GB). THOMAS, Paul [GB/GB]; Fernlea, Newport, South Wales NP6 3AY (GB). HOBDAV, Don [GB/GB]; 24 Celandine Court, Ty-Canoe, Cwmbran, Gwent NP44 6SU (GB).			
(74) Agents: WAITE, Anthony, William et al.; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).			

(54) Title: DISC BRAKE SEAL ASSEMBLY

## (57) Abstract

A seal device for use in sealing between parts of a thrust assembly of a disc brake has a support element (31) adapted to be carried by a first part (25) of the thrust assembly, the support element (31) carrying a seal (33) arranged so that, with the support element (31) in its position of use on the first part (25), the seal (33) engages a surface of a second part (25) of the thrust assembly in sealing relationship. Also disclosed is a thrust assembly for a disc brake and a disc brake incorporating such an assembly.

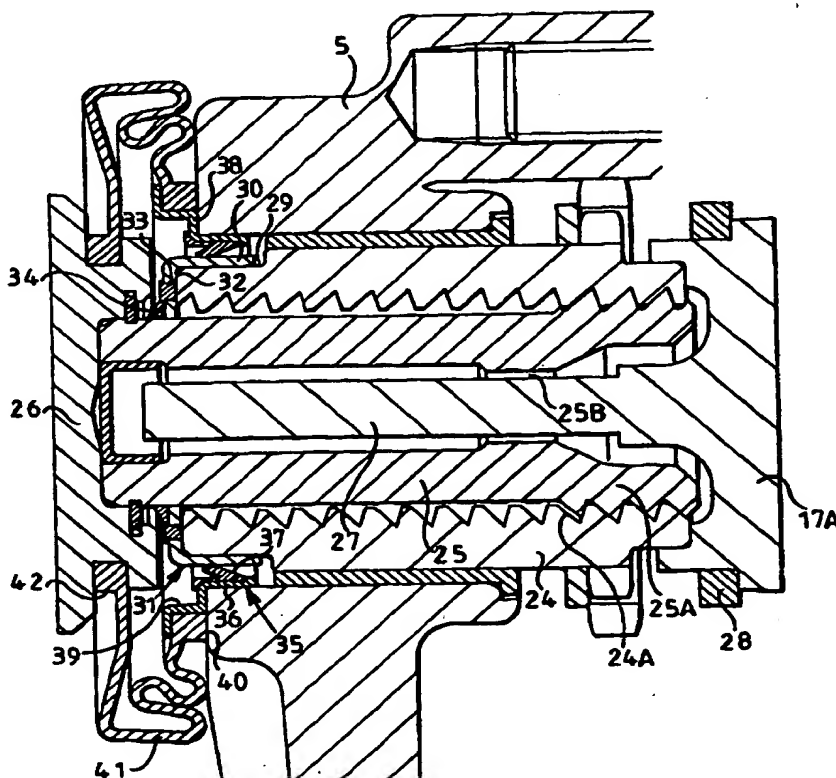

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## DISC BRAKE SEAL ASSEMBLY

This invention relates to a seal device for use in sealing between parts of a thrust assembly of a disc brake, primarily for a motor vehicle, and to a disc brake incorporating the seal device and thrust assembly.

One conventional type of thrust assembly, in the form of an adjustable tappet assembly, has a pair of threadedly interengaged parts forming a strut of which the length can be varied by relative rotation between the parts to perform a brake adjustment, in use. In order to provide the necessary sealing between the relatively rotatable strut parts and between the strut parts and adjacent surfaces, it has been necessary to provide multiple seals, together with inserts for the retention and/or support of the seals, as well as to effect machining of the parts to provide adequate sealing surfaces for engagement by the various seals. Such arrangements are complicated to manufacture and assemble, giving rise to relatively high costs.

An object of the invention is to provide a simpler and more cost-effective seal device for use in a thrust assembly of a disc brake, as compared with the aforesaid conventional arrangements.

According to a first aspect of the invention, a seal device for use in sealing between parts of a thrust assembly of a disc brake comprises a support element adapted to be carried externally by a first part of the thrust assembly, the support element carrying a seal arranged so that, with the support element in its position of use on the first part, the seal engages a surface of a second part of the thrust assembly in sealing relationship.

- 2 -

In one convenient arrangement, an outer surface of the support element serves, in use, for engagement by a further seal carried by adjacent structure.

Preferably, the support element is in the form of a cap having a generally annular skirt adapted to fit, in use, over an end portion of the first element, the outer surface of the skirt serving for engagement by said further seal.

According to another aspect of the invention, a seal device for use in sealing between parts of a thrust assembly of a disc brake comprises a support element adapted to be carried by a first part of the thrust assembly, the support element carrying a seal arranged so that, with the support element in its position of use on the first part, the seal engages a surface of a second part of the thrust assembly in sealing relationship, the support element being arranged so that an outer surface thereof serves, in use, for engagement by a further seal carried by adjacent structure.

Preferably, the support element is carried externally by said first part of the thrust assembly and is conveniently in the form of a cap having a generally annular skirt adapted to fit, in use, over an end portion of the first element, the outer surface of the skirt serving for engagement by said further seal.

According to a further aspect of the invention, a thrust assembly comprises a pair of relatively movable parts, and a seal device which has a support element carried externally by a first of said parts, the support element carrying a seal arranged to engage a surface of a second of said parts in sealing relationship.

Conveniently, an outer surface of the support element provides a sealing surface engaged by a further seal carried by adjacent structure.

The support element is preferably in the form of a cap having a generally annular skirt fitted over an end portion of the first element, the outer surface of the skirt providing the sealing surface engaged by the further seal.

According to a yet further aspect of the invention a thrust assembly comprises a pair of relatively movable parts, and a seal device which has a support element carried by a first of said parts, the support element carrying a seal arranged to engage a surface of a second of said parts in sealing relationship, the support element being arranged so that an outer surface thereof serves, in use, for engagement by a further seal carried by adjacent structure.

Preferably the support element is carried externally by said first part and is conveniently in the form of a cap having a generally annular skirt fitted over an end portion of the first element, the outer surface of the skirt providing the sealing surface engaged by the further seal.

The invention will now be described, by way of example, with reference to the accompanying drawings in which:-

Figure 1 is a plan view, partly in cross-section, of one form of the brake of the invention;

Figure 2 is a cross-section along line A-A of Figure 1, and

- 4 -

Figure 3 is an enlarged cross-sectional view of a thrust member forming part of the brake of Figures 1 and 2.

Referring to Figures 1 and 2 of the drawings, the illustrated disc brake has a fixed carrier 1 which carries a pair of friction pads 2, 3 disposed respectively at either side of a brake disc 4. The carrier serves to mount the brake on a vehicle and to absorb torque sustained by the pads during a braking operation. A clamp member or caliper 5 straddles the brake disc and is mounted on the carrier so as to be slidable axially of the brake disc relative to the carrier, by way of pins 6, in conventional manner. The caliper carries an integral housing 7 which is adapted to mount a conventional air or other power actuator (not shown) on an external face 8 thereof. The housing defines a chamber 9 within which a pivotal brake actuating lever 10 may conveniently perform an angular reciprocal swinging movement, as indicated by the arrows (Figure 2), under the action of a thrust member of the power actuator which, with the latter mounted on the face 8, extends through an opening 11 of the housing into engagement with a recess 12 of the lever 10. The lever is integral with or attached to a rotary actuating member 13 which is rotatably supported within the caliper by way of a pair of needle bearing assemblies 14. The member 13 is recessed to house respective cylindrical rollers 15, 16, the axes of which are offset from the rotary axis of the actuating member 13 to form an eccentric actuating arrangement with the rollers 15 and 16 bearing against respective thrust members 17A and 18A of adjacent adjustable tappet assemblies indicated generally at 17 and 18. Rotation of the lever 10 and its connected shaft 13 causes actuating thrust to be applied via the tappet assemblies to the directly actuated friction element 2 and, by a reaction via the caliper 5, to the indirectly actuated friction element 3.

The thrust assemblies, illustrated as adjustable tappet assemblies 17 and 18, are disposed at either side of a centre line of the brake passing through the lever 10 and are associated with an adjuster assembly 19 which lies laterally offset from and adjacent the tappet assembly 18. The adjuster assembly may be of any appropriate conventional type needing no detailed description for the purpose of the present invention. The adjuster responds to excessive movement of the friction elements 2, 3 and produces resultant rotation of an adjuster shaft 20 which, via an output gear 21 and an intermediate idler gear 21A, rotates a pair of input gears 22, 23 associated respectively with the adjustable tappet assemblies 17, 18.

The tappet assemblies are of identical construction and operation, and only the assembly 17 will be described, with reference to Figures 1 and 3, in sufficient detail for a full understanding of the present invention. This assembly has an outer sleeve 24 which is internally threaded at 24A and receives a hollow internal shaft 25 having an externally threaded portion 25A extending over a part of its length for cooperation with the internal thread of the sleeve 24. The shaft and sleeve form between them an adjuster strut of variable length. The shaft 25 is provided, at its outer end, with a tappet head 26, which bears against the adjacent friction element 2 and which is releasably coupled to the shaft so as, conveniently, to be freely rotatable relative to the latter. To enable the shaft 25 to be moved axially by rotation of the sleeve 24 so as to extend the adjuster strut in compensation for wear of the friction elements, it is necessary to lock this shaft against rotary movement. This is achieved, in the present embodiment, by providing the thrust member 17A, which is engaged over the adjacent end of the sleeve 24, with an elongate stem 27 of non-

- 6 -

circular cross-section which extends within the hollow shaft 25, of which at least a part 25B of the internal surface forms a complementary bore. The thrust members 17A and 18A of the respective tappet assemblies are each provided with, for example, a generally planar external surface for locking engagement with a corresponding adjacent surface on a fixed plate 28.

The present invention is concerned particularly with improving the sealing arrangement between the outer sleeve 24 and inner shaft 25. To this end, as can be seen in Figure 3, an end portion of the sleeve 24 adjacent the tappet head 26 is relieved to provide a reduced diameter portion 29, which carries a support element 31 of a seal device, the element 31 being in the general form of a cap. An annular skirt or flange 30 of the support element is received over the portion 29, conveniently by press-fitting. The inner shaft 25 extends through a flat annular base 32 of the support element which rests against the adjacent end of the sleeve 24 and carries a seal, of which an annular rim 33 is housed within the portion 32. An annular lip 34 of the seal engages the outer surface of the sleeve 25 in sealing relationship. The support element 31 may conveniently be manufactured from stainless steel. A metal retainer 35 has a first annular portion 36, which is a press fit in the caliper 5, and to which is attached a further lip seal 37 engaging the outer surface of the annular skirt 30 of the support element 31, such outer surface providing a smooth sealing surface for cooperation with the lip seal 37. The retainer 35 has a further annular portion 38 lying against an adjacent surface of the caliper 5, the remainder of the retainer forming an annular channel 39 to receive a bead 40 of a main convoluted boot seal 41, a further bead 42 of which is received within a groove of the tappet head 26.



- 7 -

The above-described sealing device 31 is particularly advantageous in terms of its simplicity and effectiveness in providing a high integrity seal between the sleeve 24 and shaft 25 and also in providing a smooth sealing surface on its cylindrical part 30, for engagement by the further seal 37, thereby largely obviating the necessity for high quality expensive machining and/or plating of the outer surface of the sleeve 24 for sealing purposes.

It will be understood that the seals 34 and 37 may be of any convenient form and retained in any convenient manner on their respective supports 31, 35 which, in turn, may have any convenient shape whilst retaining their essential purpose according to the invention.

The flat annular portion 32 may conveniently provide stop means for limiting the axial movement of the tappet assembly at extremes of adjustment.

## CLAIMS

1. A seal device for use in sealing between parts of a thrust assembly of the disc brake, comprising a support element adapted to be carried externally by a first part of the thrust assembly, the support element carrying a seal arranged so that, with the support element in its position of use on the first part, the seal engages a surface of a second part of the thrust assembly in sealing relationship.
2. A seal device according to Claim 1, wherein an outer surface of the support element serves, in use, for engagement by a further seal carried by adjacent structure.
3. A seal device according to Claim 1 or Claim 2, wherein the support element is in the form of a cap having a generally annular skirt adapted to fit, in use, over an end portion of the first element, the outer surface of the skirt serving for engagement by said further seal.
4. A seal device according to Claim 3, wherein an annular base of the cap rests, in use, against the adjacent end of the first part of the thrust assembly with a portion of said second part extending through the base.
5. A seal device for use in sealing between parts of a thrust assembly of a disc brake, comprising a support element adapted to be carried by a first part of the thrust assembly, the support element carrying a seal arranged so that, with the support element in its position of use on the first part, the seal engages a surface of a second part of the thrust assembly in sealing relationship, the support element being arranged so

- 9 -

that an outer surface thereof serves, in use, for engagement by a further seal carried by adjacent structure.

6. A seal device according to Claim 5, wherein the support element is carried externally by said first part of the thrust assembly.

7. A seal device according to Claim 5 or Claim 6, wherein the support element is in the form of a cap, having a generally annular skirt adapted to fit, in use, over an end portion of the first element, the outer surface of the skirt serving for engagement by said further seal.

8. A seal device according to Claim 7, wherein an annular base of the cap rests, in use, against the adjacent end of the first part of the thrust assembly with a portion of said second part extending through the base.

9. A thrust assembly of a disc brake comprising a pair of relatively movable parts, and a seal device which has a support element carried externally by a first of said parts, the support element carrying a seal arranged to engage a surface of a second of said parts in sealing relationship.

10. An assembly according to Claim 9, wherein an outer surface of the support element provides a sealing surface engaged, in use, by a further seal carried by adjacent structure.

11. An assembly according to Claim 9 or Claim 10, wherein the support element is in the form of a cap having a generally annular skirt fitted over an end portion of the first element, the outer surface of the skirt providing the sealing surface engaged by the further seal.

- 10 -

12. An assembly according to Claim 11, wherein an annular base of the cap rests, in use, against the adjacent end of the first part of the thrust assembly with a portion of said second part extending through the base.

13. A thrust assembly of a disc brake comprising a pair of relatively movable parts, and a seal device which has a support element carried by a first of said parts, the support element carrying a seal arranged to engage a surface of a second of said parts in sealing relationship, the support element being arranged so that an outer surface thereof serves, in use, for engagement by a further seal carried by adjacent structure.


14. An assembly according to Claim 13, wherein the support element is carried externally by said first part.

15. An assembly according to Claim 13 or Claim 14, wherein the support element is in the form of a cap having a generally annular skirt fitted over an end portion of the first element, the outer surface of the skirt providing the sealing surface engaged by the further seal.

16. An assembly according to Claim 14, wherein an annular base of the cap rests, in use, against the adjacent end of the first part of the thrust assembly with a portion of said second part extending through the base.

17. A disc brake incorporating a thrust assembly according to any one of Claims 9 to 16.

FIG 1

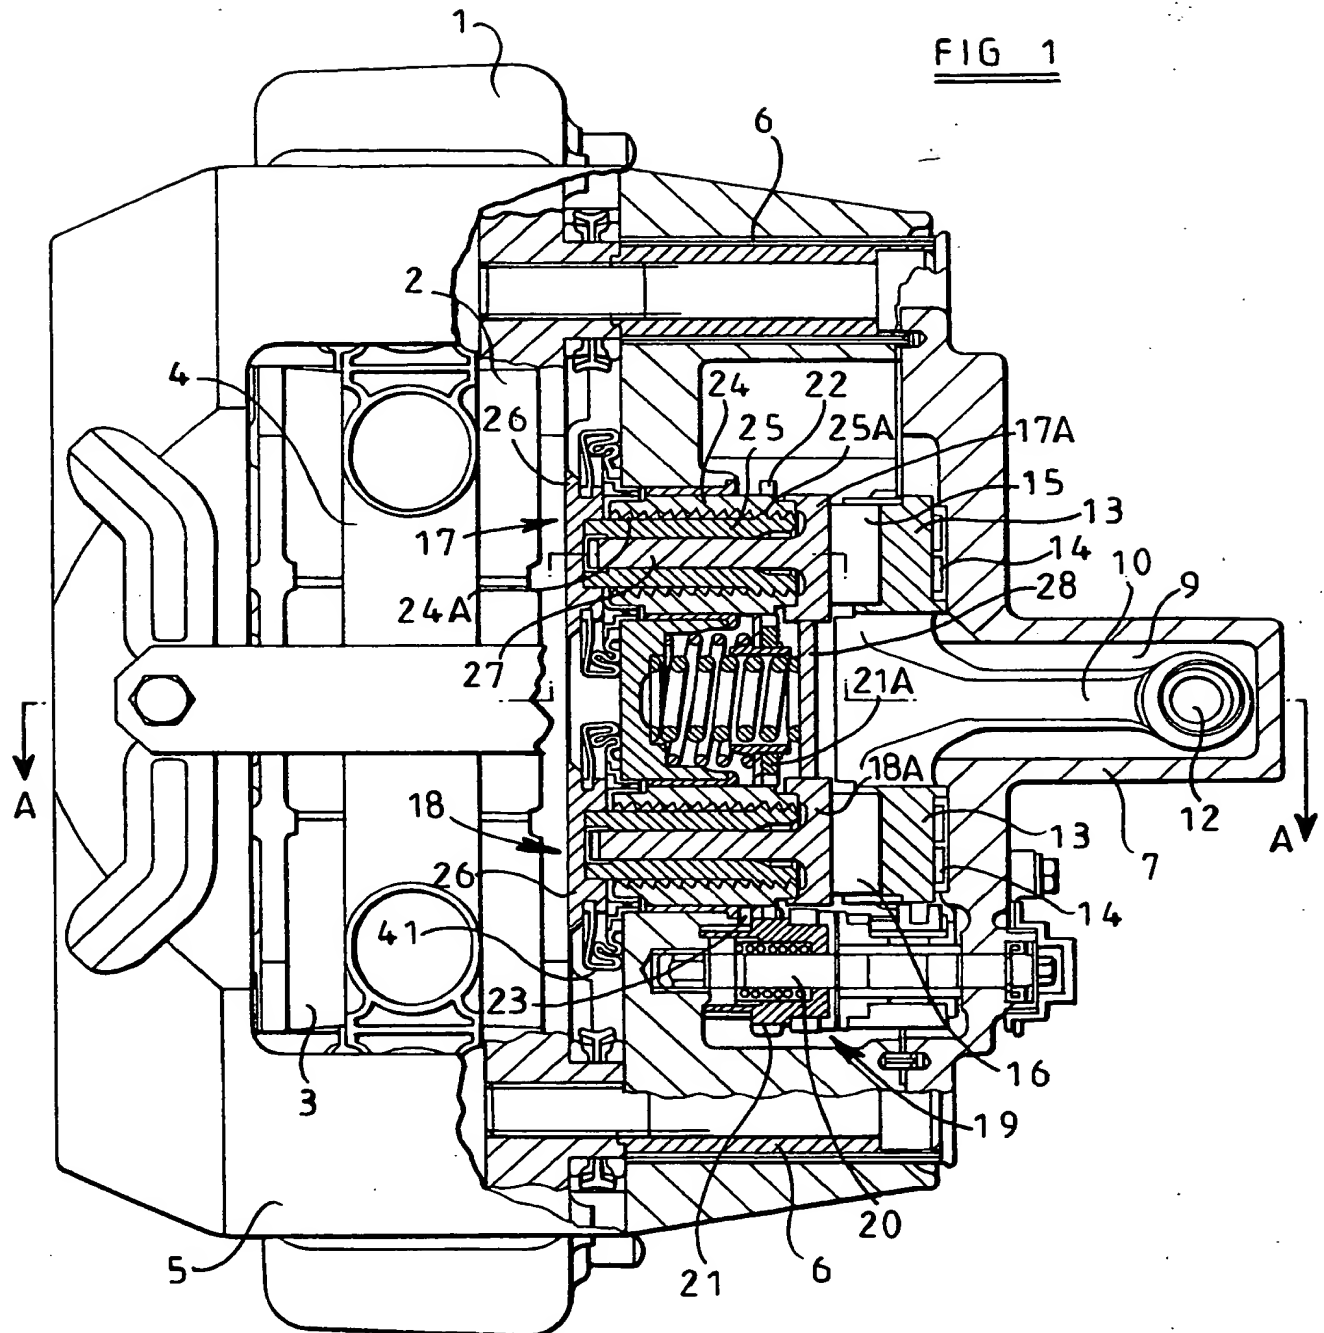

529 Rec'd PCT/PTO 26 SEP 2000

**THIS PAGE BLANK (USPTO)**


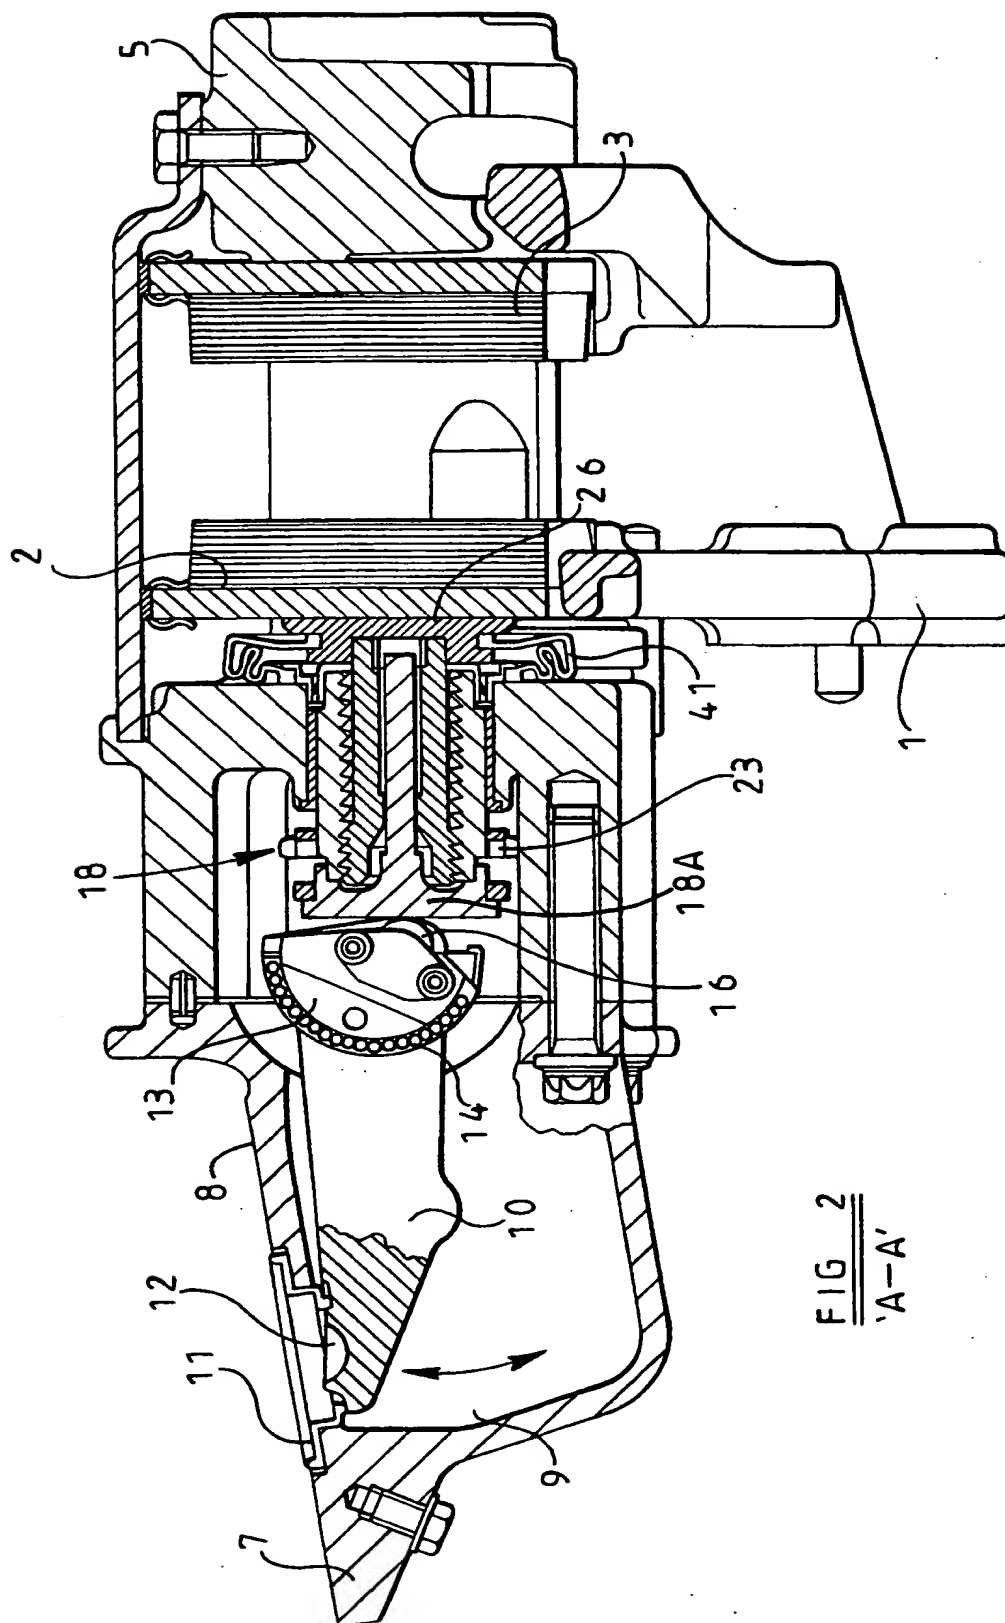


FIG 2  
'A-A'

529 Re PCT/PTO 26 SEP 2000

**THIS PAGE BLANK (USPTO)**



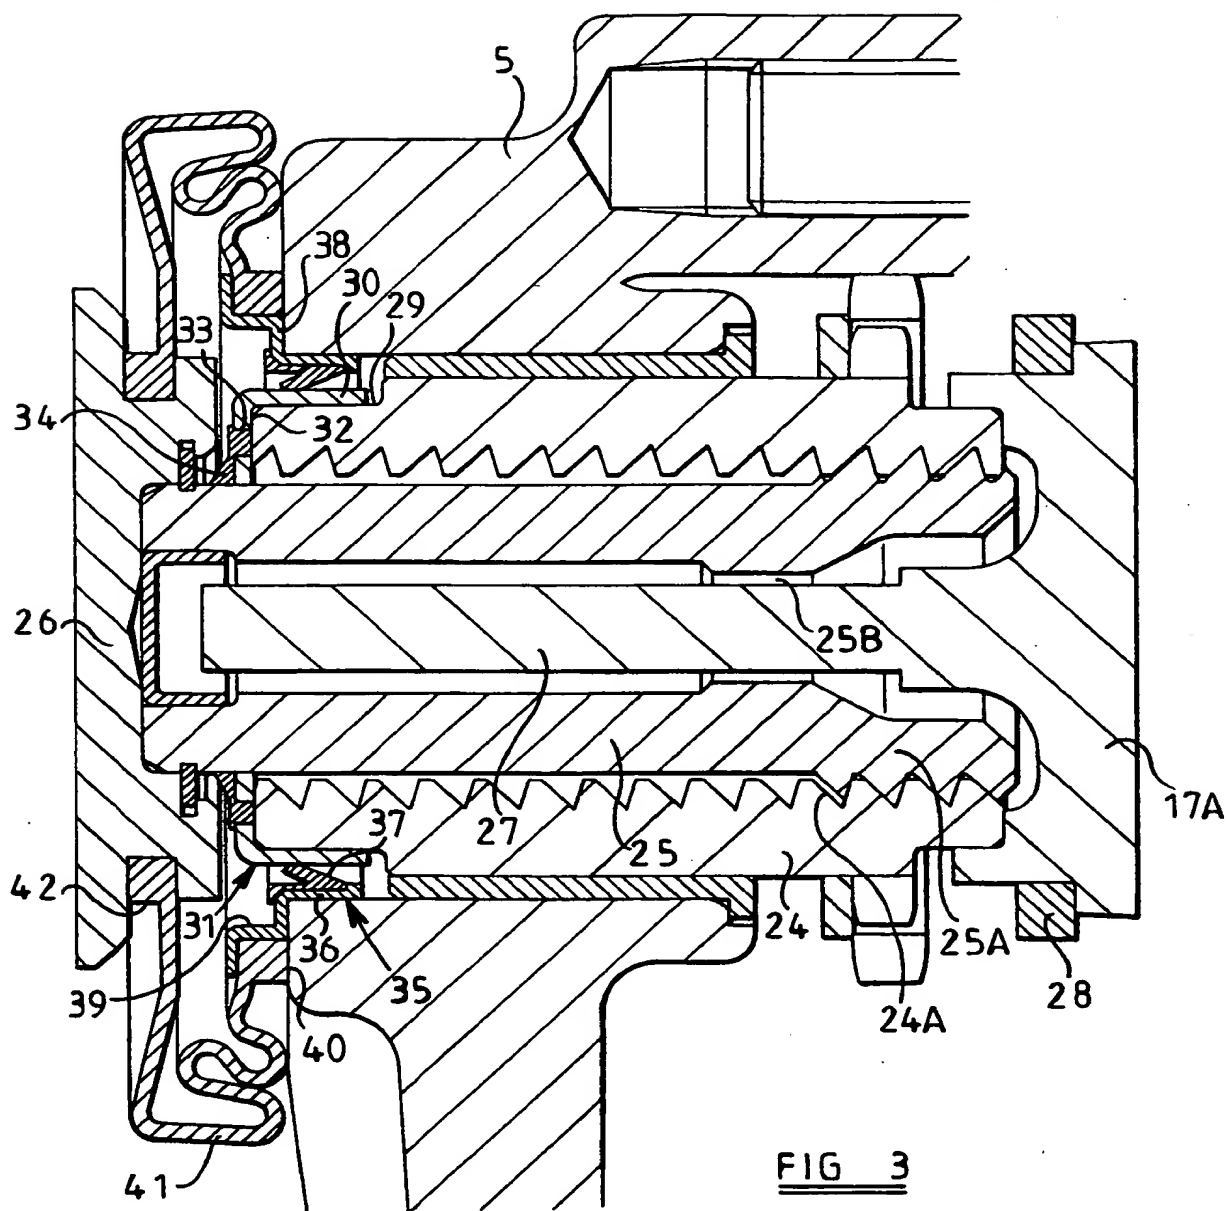

529 Rec'd PCT/PTO 26 SEP 2000

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 99/00839

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 F16J15/32 F16D65/00 F16D65/56 F16D65/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F16J F16D B61H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	DE 43 34 914 A (KNORR-BREMSE SYSTEME FÜR NUTZFAHRZEUGE) 20 April 1995  see column 2, line 60 - line 64 see column 7, line 32 - line 61; figure 1B ---	1,2,5,6, 9,10,13, 14,17 3,7,11, 15
X A	US 4 502 572 A (DAVIDSON ET AL.) 5 March 1985  see column 5, line 41 - column 6, line 40; figures ---	1,9,17  5,13
X	FR 2 593 570 A (GUDIN) 31 July 1987 see the whole document ---	1,2,5,6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

29 June 1999

Date of mailing of the international search report

07/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Becker, R

# INTERNATIONAL SEARCH REPORT

Int'l. Application No

PCT/GB 99/00839

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	GB 1 558 148 A (TOKICO) 19 December 1979 see page 2, line 57 - line 104; figures ---	1,9,17 5,13
X A	US 3 490 343 A (AFANADOR ET AL.) 20 January 1970 see column 3, line 74 - column 4, line 17; figure 3 ---	1,9,17 5,13
X A	US 4 506 768 A (INNOCENT) 26 March 1985 see column 4, line 3 - line 10; figure 3 -----	1,9,17 5,13
<b>THIS PAGE BLANK (USPTO)</b>		

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/00839

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4334914 A	20-04-1995	BR 9404064 A EP 0648952 A JP 2857071 B JP 7158671 A US 5568845 A	13-06-1995 19-04-1995 10-02-1999 20-06-1995 29-10-1996
US 4502572 A	05-03-1985	AU 574372 B AU 3143584 A BR 8404208 A CA 1226531 A DE 3475422 A EP 0139117 A JP 60073140 A	07-07-1988 07-03-1985 23-07-1985 08-09-1987 05-01-1989 02-05-1985 25-04-1985
FR 2593570 A	31-07-1987	NONE	
GB 1558148 A	19-12-1979	BR 7704695 A	28-03-1978
US 3490343 A	20-01-1970	NONE	
US 4506768 A	26-03-1985	AU 523262 B AU 3781278 A BR 7804660 A DE 2832007 A FR 2398232 A GB 2001710 A, B JP 54023862 A ZA 7803801 A	22-07-1982 10-01-1980 06-03-1979 08-02-1979 16-02-1979 07-02-1979 22-02-1979 25-07-1979

**THIS PAGE BLANK (USPTO)**